PART NO.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		

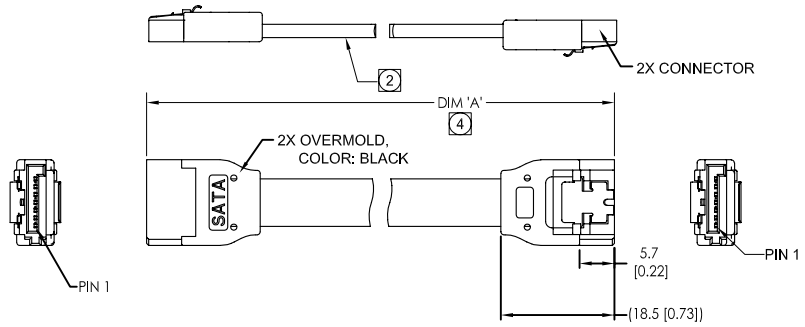

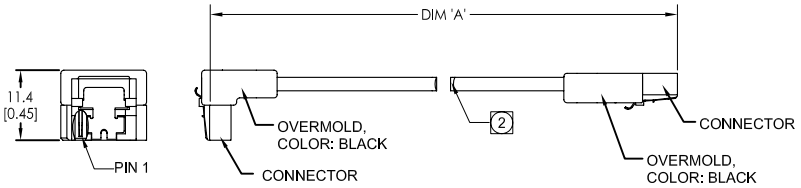

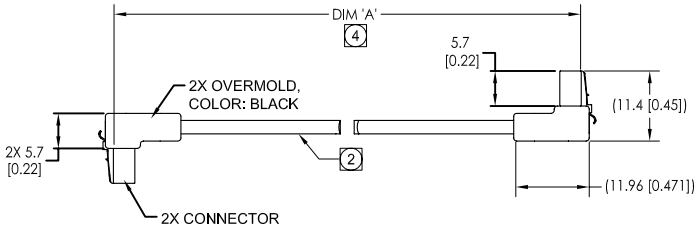

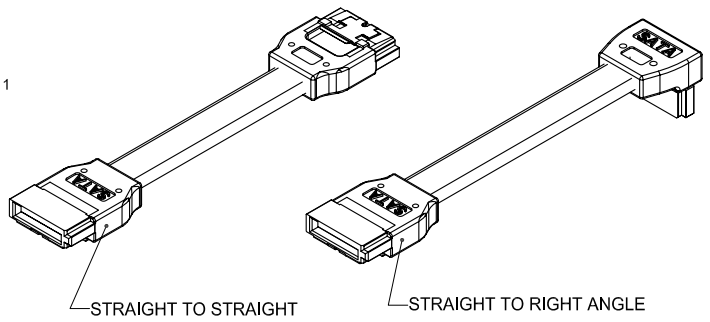

6. CONSULT WITH FACTORY FOR OTHER CONTACT PLATING, OVERMOLD COLORS, CABLE COLORS, OR CABLE LENGTHS

(5) OVERMOLD COLOR: BLACK

(4) TOLERANCE OF CABLE LENGTH:

DIM 'A'	TOLERANCE IN[MM]
0" - 20" [0 - .5M]	+/-1.0 [25.4]
20" - 39" [0 - 1M]	+/-2.0 [50.8]

3. MEETS THE REQUIREMENT OF THE SERIAL ATA II STANDARD

(2) RECOMMENDED SERIAL ATA CABLES:
-HITACHI CABLE MANCHESTER
-SPACE SHUTTLE
-DER AN, APPROVED EQUIVALENT

1. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES

NOTES : UNLESSS OTHERWISE SPECIFIED

WIRING DIAGRAM :

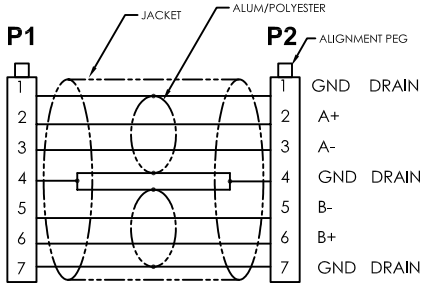

ORDERING NOMENCLATURE

CS - Z709071 - X C - X - XX X

LATCHING SATA CABLE ASSEMBLY

END STYLE
0 = STRAIGHT TO STRAIGHT
1 = STRAIGHT TO RA
2 = RA TO RA

CONTACT AREA PLATING
C = .000015" AU

(2) **CABLE STYLE**
0 = 26 AWG RED
1 = 30 AWG RED
2 = 26 AWG BLUE
3 = 30 AWG BLUE

(4) **LENGTH**
DIM 'A' IN INCHES

UNIT
BLANK = INCHES
M = METERS

PRIMARY DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE:
DECIMALS ANGLES
.X ±.25 ±3°
.XX ±.13

SECONDARY DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DECIMALS ANGLES
.XX ±.010 ±3°
.XXX ±.005

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN	
CHECKED	

www.cpustuff.com 949-713-9070

CABLE ASSEMBLY - LSATA SERIES
LOW PROFILE
ROHS COMPLIANT

SIZE	CODE IDENT NO.	DRAWING NO.	REV.
C			

SCALE: 1:1 SHEET 1 OF 1