


P/N	7MALE2M	REV.	DESCRIPTION	D.O.	APPD.

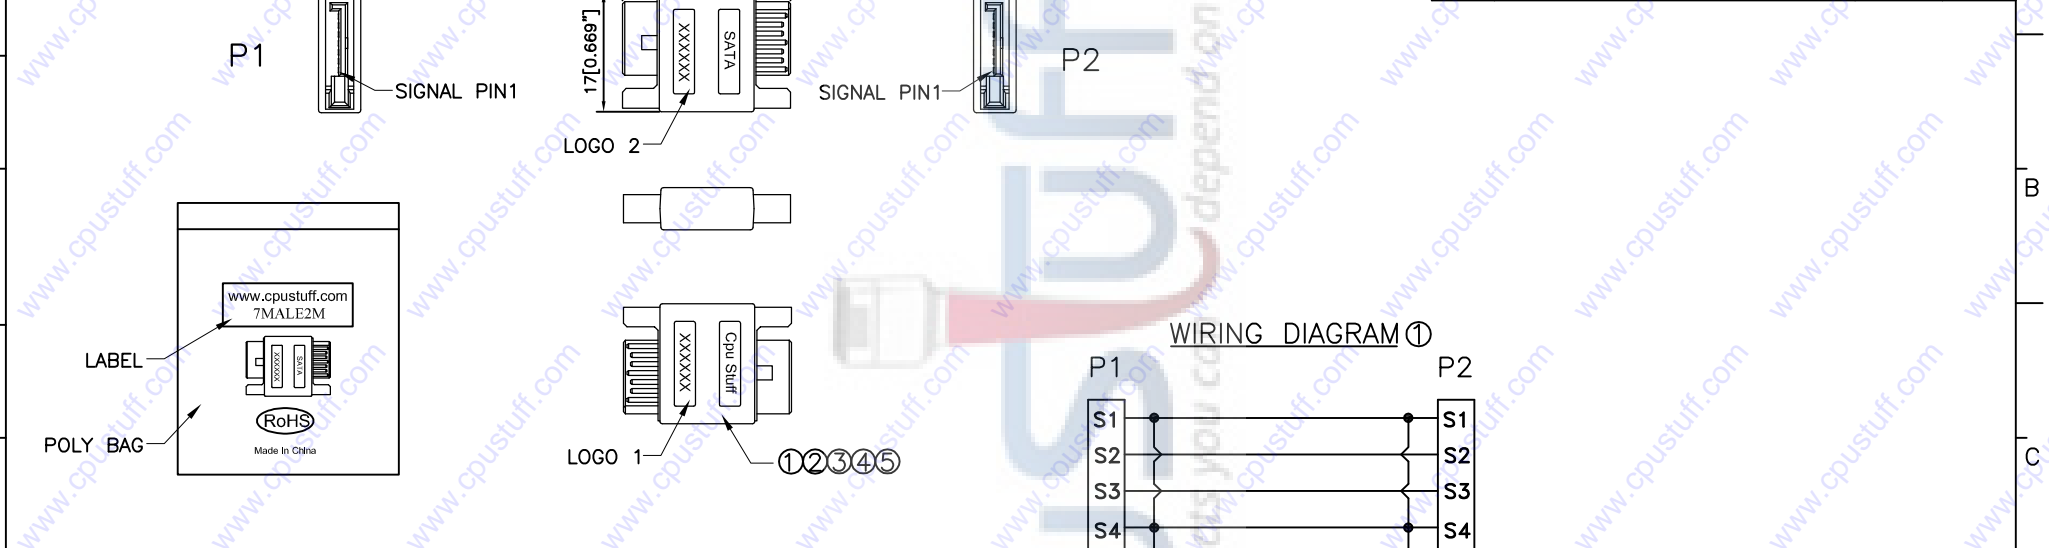

ELECTRICAL SPECIFICATION:
 1.OPEN/SHORT 100% TEST PASS.
 2.INSULATION RESISTANCE: 20MΩ MIN.
 3.CONDUCTOR RESISTANCE: 2Ω MAX.
 4.HI-VOLTAGE: 300V DC/0.1 SEC.

NOTES : UNLESS OTHERWISE SPECIFIED
 1. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)
 2. INDIVIDUALLY PACKAGE IN POLY BAG WITH LABEL.

5		COPPER FOIL	COPPER FOIL, LSZH.
4	1	PCB	PCB, FR-4. LSZH.
3		TPE	TPE, UL 94V-0. LSZH.
2		PE	PE CLEAR. LSZH.
1	2	CONNECTOR	SATA 7P PLUG. PIN GOLD PLATED 15u", MOLD TYPE, Connector LSZH.
ITEM	QTY	P/N	DESCRIPTION

MILLIMETERS	INCH	UNITS	MM	NAME(INTENDED USE)	Cpu Stuff
X'± 2'	X'± 2'	MAT'L		SATA 7P PLUG TO 7P PLUG ADAPTER	sales@cpustuff.com
.X± 0.3	.X± .012			PART NO.(INTENDED USE)	949-713-9070
.XX± 0.15	.XX± .006	FINISH		APPD:	06/09/10'
.XXX± ----	.XXX± ----	Q'TY		CHKD:	06/09/10'
				DR:	06/09/10'
					DWG NO.: CSH709307
					SCALE SHEET REV.
					NONE 1/1