



REV.	DESCRIPTION	D.O.	APPD.
A	Initial Release		
BX1	ADD SCREWS AND LABEL Beyond 06/08/10'		

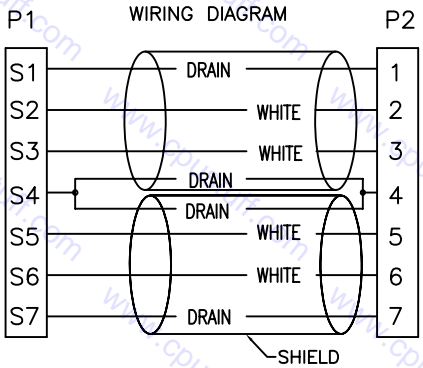

- NOTE:
1. ELECTRICAL SPECIFICATION:
 CABLE MUST PASS CONTINUITY TEST
 INSULATION RESISTANCE: 20M OHM MIN.
 CONDUCTOR RESISTANCE: 2 OHM MAX.
 HI-VOLTAGE: 300V DC/0.1SEC.
 2. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT.(RoHS)



DETAIL A

ITEM	DESCRIPTION	UNITS	Q'TY
⑧	LABEL, SEE "DETAIL A".	PCS	1
⑦	METAL SCREW, M3.0, L=10mm	PCS	2
⑥	METAL NUT, M3.0, L=2.9mm	PCS	2
⑤	PVC 30P, COLOR: BLACK, UL 94V-0.	KG	N/A
④	CLEAR PE	KG	N/A
③	EXTERNAL 7P SATA PLUG, GOLD PLATED 15U".	PCS	1
②	SATA 22P MALE, GOLD PLATED 15U".	PCS	1
①	UL 20276, [26AWG(1/0.40TA)*2P+A2E]*2C, OD=2.02X7.8mm, TRANSLUCENT BLUE, PVC JACKET.	MM	N/A

MILLIMETERS	INCH	UNITS	MM	NAME(INTENDED USE)	Cpu Stuff
X.± Z'	X.± Z'	MAT'L		22PIN SATA MALE TO 7PIN EASTA CABLE ASSY	sales@cpustuff.com
.X± 0.25	.X± .0098			PART NO.(INTENDED USE)	949-713-9070
.XX± 0.15	.XX± .0059	FINISH		CS5830	TITLE: 22PIN SATA MALE TO 7PIN EASTA CABLE ASSY
.XXX± ----	.XXX± ----	Q'TY		APPD:	DWG NO.: CSH709184
				CHKD:	SCALE SHEET REV. NONE 1/1 BX1
				DR:	