


REV.	DESCRIPTION	D.O.	APPD.
X1	Initial Release	N/A	



CS6467-XX I
CABLE LENGTH ———
DIM "A" IN INCHES

Tolerances: 3.1"~12.0":±0.5";
12.1"~40.0":±1.0";


ELECTRICAL SPECIFICATION:

- 1.OPEN/SHORT 100% TEST PASS.
- 2.INSULATION RESISTANCE: 20MΩ MIN.
- 3.CONDUCTOR RESISTANCE: 3Ω MAX.
- 4.HI-VOLTAGE: 300V DC/0.1 SEC.

NOTES : UNLESS OTHERWISE SPECIFIED

1. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)

CROSSED WIRING DIAGRAM

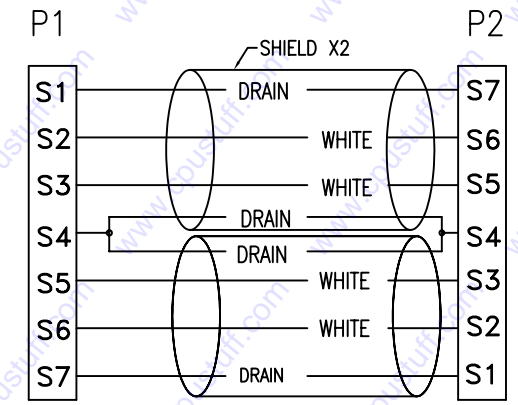

⑤	1	LABEL	LABEL, SEE "DETAIL A".
④	N/A	PVC	PVC 45P, UL 94V-0, COLOR: BLACK.
③	N/A	PE	PE CLEAR.
②	2	CONNECTOR	SATA 7P SOCKET. PIN GOLD PLATED 15u", MOLD TYPE.
①	N/A	CABLE	UL 20276 [26AWG (1/0.40TA) * 2C +A2E] * 2F, OD=2.2 * 7.6mm, RED PVC JACKET.
ITEM	QTY	P/N	DESCRIPTION

MILLIMETERS	INCH	UNITS	MM	NAME(INTENDED USE)	Cpu Stuff sales@cpustuff.com			
X.± 2'	X.± 2'	MAT'L		SATA 7P SOCKET TO SOCKET CABLE ASS'Y	TITLE: SATA 7P SOCKET TO SOCKET CABLE ASS'Y			
.X± 0.3	.X± .012			PART NO.(INTENDED USE)				
.XX± 0.15	.XX± .006	FINISH		CS6467-XXI	DWG NO.: CSH709306			
.XXX± ----	.XXX± ----			APPD:				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CIRCUIT ASSEMBLY SHEN ZHEN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CIRCUIT ASSEMBLY SHEN ZHEN				CHKD:		SCALE	SHEET	REV.
				DR:		NONE	1/1	X1