


ELECTRICAL SPECIFICATION:
 1. OPEN/SHORT 100% TEST PASS.
 2. INSULATION RESISTANCE: 20MΩ MIN.
 3. CONDUCTOR RESISTANCE: 2Ω MAX.
 4. HI-VOLTAGE: 300V DC/0.1 SEC.

NOTES : UNLESS OTHERWISE SPECIFIED

1. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)

DIM 'A' IN INCHES
 TOLERANCES: 04" ~ 12" ±0.5"
 13" ~ 40" ±1"
 41" ~ 80" ±2"
 > 81" ±3"

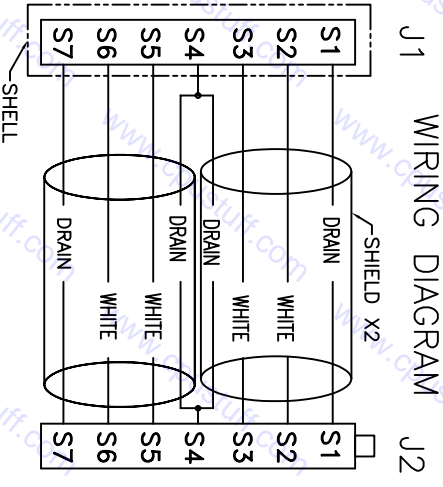

ITEM	QTY	P/N	DESCRIPTION
1	1		CABLE
2	1		CONNECTOR
3	1		CONNECTOR
4	1		PE
5	1		PVC
6	1		PVC
7	1		NUT
8	2		HEX. NUT

MILLIMETERS	INCH	UNITS	MM	NAME (INTENDED USE)	TITLE:
X±	Z	X±	Z	MATL	Cpu Stuff
.XX±	0.15	.XX±	.006	FINISH	ESATA TO SATA CABLE ASSY
.XXX±	---	.XXX±	---		ESATA TO SATA CABLE ASSY

Q'TY	CHKD:	APPD:	DWG NO.:
	12/14/09'	12/14/09'	
	DR:		

SCALE	SHEET	REV.
NONE	1/1	X1

REV.	DESCRIPTION	DO.	APPD.
X1	Initial Release	N/A	Roy