


WIRE CHART



- NOTE:
1. OUTER MOLD WITH BLACK PVC RESIN 887800042.
- ELECTRICAL PERFORMANCE:
2. DIELECTRIC STRENGTH: 500V/0.01S DC
  3. INSULATION RESISTANCE: 100M OHMS MIN.
  4. CONDUCTIVE RESISTOR: 2 OHMS

<p>QUALITY SYMBOLS</p> <p>▼=0</p> <p>∇=0</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		mm				INCH	<p>TITLE</p> <p>S-ATA ST LATCHING TO ST LATCHING SIGNAL CBL RED,0.5M,1.0M</p> <p>www.cpustuff.com - 949-713-9070</p>
	4 PLACES	±---				±---	
	3 PLACES	±---				±---	
	2 PLACES	±---				±---	
1 PLACE	±---	±---					
	ANGULAR ±---°					DOCUMENT NO.	SHEET NO. 1 OF 1
			SIZE A4	sales@cpustuff.com			

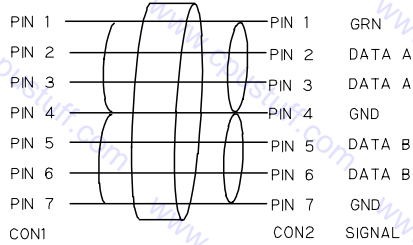