



PART NO. _____

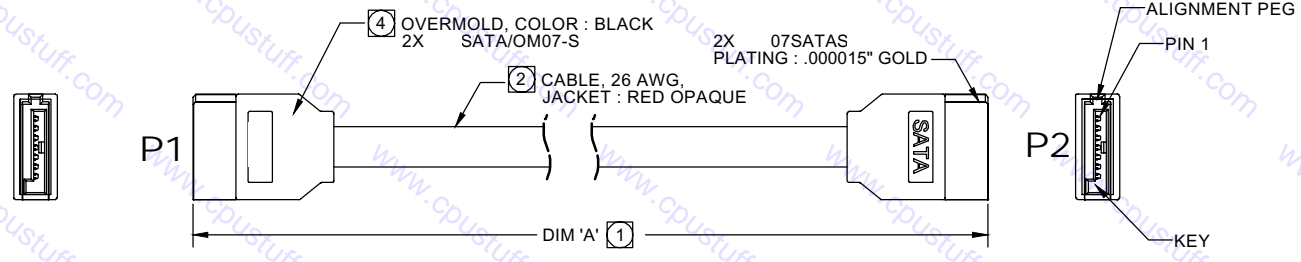

WIRING DIAGRAM :

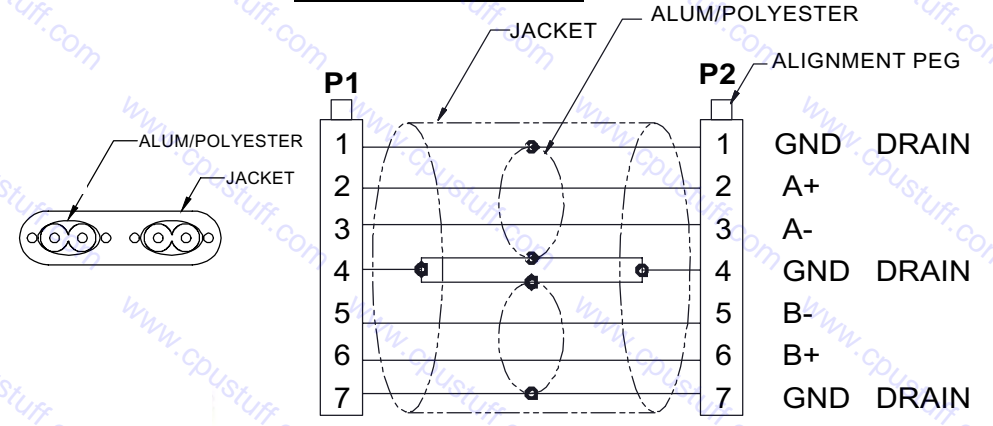

5. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS).

4 CONSULT WITH CA FACTORY FOR OTHER CONTACT PLATING, OVERMOLDS COLORS, CABLE COLORS, LENGHTS AND GAUGES (30AWG).

3. VOLTAGE RATING : 30V

2 RECOMMENDED SERIAL ATA CABLE SOURCES :
HITACHI CABLE MANCHESTER
SPACE SHUTTLE
DerAn
OR CAC APPROVED EQUIVALENT
CABLE MUST BE PRINTE WITH UL STYLE & MFR. FILE NO.

1 TOLERANCE OF CABLE LENGTH (SEE ORDERING NOMENCLATURE)
NOTES : UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES TOLERANCES ARE:		APPROVALS	DATE
DECIMALS	ANGLES	DRAWN	11-8-01
.XX ±.50	±3°	CHECKED	11-8-01
.XXX ±.25			
DIMENSIONS IN BRACKETS [X.XX] ARE IN MILLIMETERS TOLERANCES ARE:			
DECIMALS	ANGLES		
.X ±12.7	±3°		
.XX ± 6.4			
DO NOT SCALE DRAWING			

www.cpushuff.com			
CABLE ASSEMBLY - SATA SERIES			
CA-D07SATAS-XXX-"ROHS COMPLIANT"			
SIZE	CODE IDENT NO.	DRAWING NO.	REV.
C		CSU709000	S
SCALE: 2:1		SHEET 1 OF 1	