



PART NO.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE SEE DO 6437	CP 05-29-07	I.M.

CS04SATASR

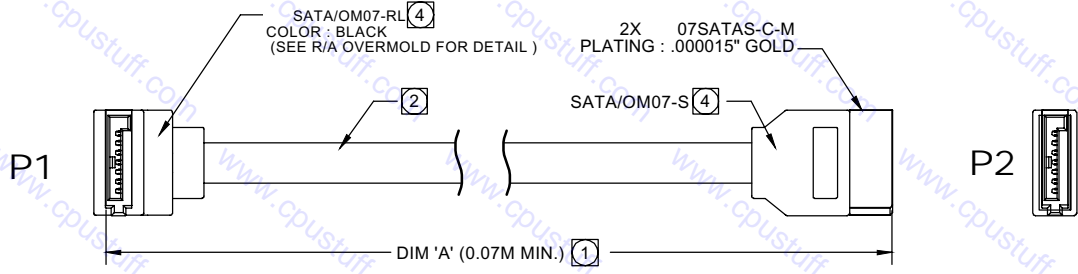

CS04SATASL

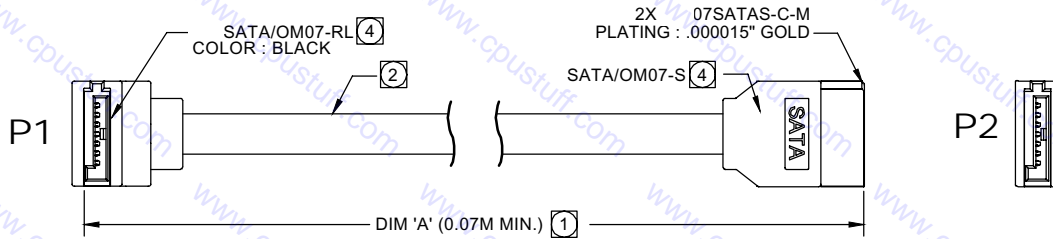


- 6. MEETS THE REQUIREMENTS OF THE SERIAL ATA II (SATA II) STANDARD.
- 5. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS).

- ④ OVERMOLD COLOR (SEE ORDERING NOMENCLATURE)
- 3. VOLTAGE RATING : 30V
- ② RECOMMENDED SERIAL ATA CABLE SOURCES :
SPACE SHUTTLE
DerAn
- ① TOLERANCE OF CABLE LENGTH :

DIM 'A'	TOLERANCE
0.07M - 0.5M	±.025M
0.51M - 1.00M	±.05M
1.01M-3.00M	±.08M

NOTES : UNLESS OTHERWISE SPECIFIED

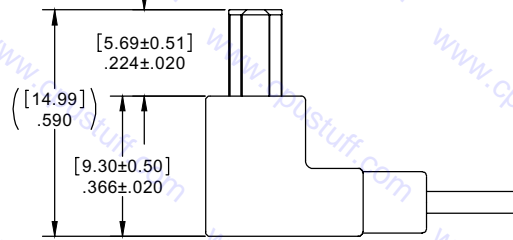

DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
DECIMALS ANGLES
.XX ±.50 ±3°
.XXX ±.25

DIMENSIONS IN BRACKETS
[X.XX] ARE IN MILLIMETERS
TOLERANCES ARE:
DECIMALS ANGLES
.X ±12.7 ±3°
.XX ± 6.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN		5-29-07
CHECKED		5-29-07

www.cpushuff.com			
CABLE ASSEMBLY - SATA SERIES			
CA-D07SATAS-XXX-"ROHS COMPLIANT"			
WITH R/A LOW PROFILE OVERMOLD			
SIZE	CODE IDENT NO.	DRAWING NO.	REV.
C	52072	CSU709079	A
SCALE: 2:1		SHEET 1 OF 2	