

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE SEE DO 6707	CP 07-21-08	A.J.

2. ELECTRICAL SPECIFICATION:
- OPEN/SHORT 100 % TEST PASS.
 - INSULATION RESISTANCE: 10M Ω MIN.
 - CONDUCTOR RESISTANCE: 1 Ω MAX.
 - HI-VOLTAGE: 300V DC/0.1 SEC.


1. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT. (ROHS)

NOTES : UNLESS OTHERWISE SPECIFIED

5		PVC	PVC 45P, UL 94V-0, COLOR: BLACK.
4		PE	PE CLEAR.
3		CONNECTOR	SATA 7P PLUG. PIN GOLD PLATED 15u", CA CONNECTOR.
2	2	CONNECTOR	SATA 7P SOCKET. PIN GOLD PLATED 15u", MOLD TYPE, CA P/N: 07SATAS
1		CABLE	UL 20276 [26AWG (1/0.40TA) * 2C +A2E] * 2F, OD=2.08 * 7.8mm, TRANSLUCENT RED JACKET.

ITEM	QTY	P/N	DESCRIPTION
4			
3			
2			
1			

WIRING DIAGRAM

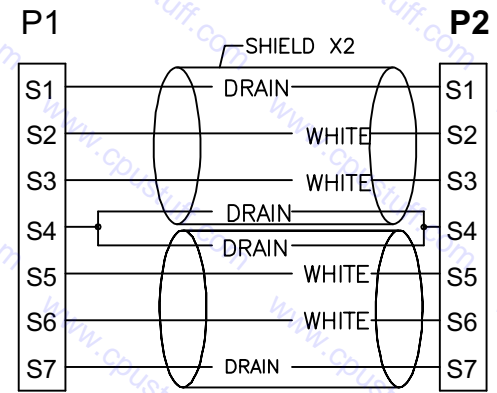

DIMENSIONS ARE IN MM TOLERANCES ARE:		APPROVALS	DATE	www.cpustuff.com	
DECIMALS X: ±.25 XX ±.13	ANGLES 33°	DRAWN	7-18-08	CABLE ASSEMBLY - SATA, ESATA SERIES, "ROHS" CA-D07SATA/07SAP-XX.X	
DIMENSIONS IN BRACKETS [XXX] ARE INCHES TOLERANCES ARE:		CHECKED	7-18-08	SIZE	CODE IDENT NO.
DECIMALS XX ±.010 XXX ±.005	ANGLES 33°			C	CSU709092
DO NOT SCALE DRAWING				DRAWING NO.	REV.
					A
				SCALE: 2:1	SHEET 1 OF 1